


REVISIONS




ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7801-01BGTG-R 型號轉來\08/02/06'

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

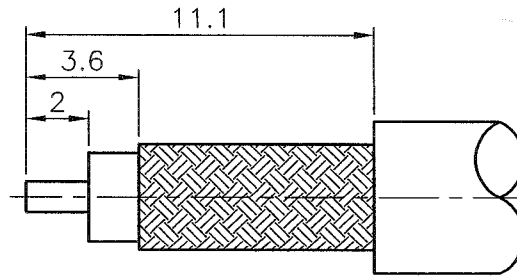

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

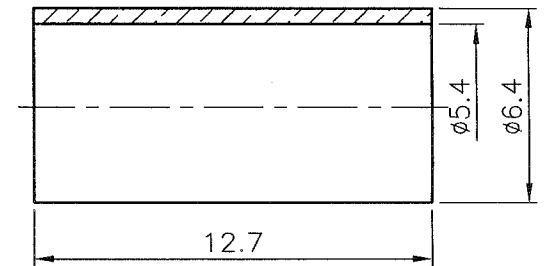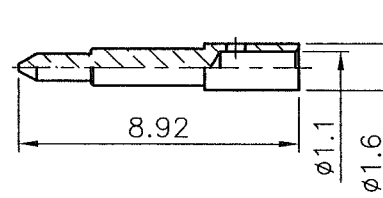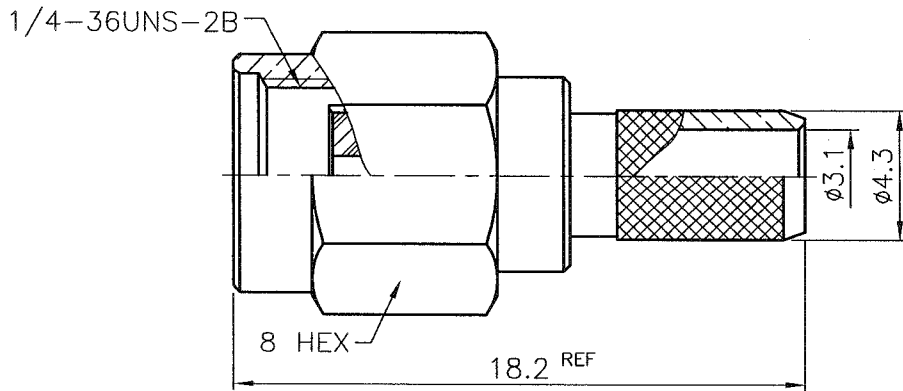

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE
HEX CRIMP SIZE .213" (5.41mm)
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)



FERRULE					NOTE 6					NOTE 2					DIMENSIONS ARE IN MILLIMETERS					PART NO.																													
CONTACT PIN					NOTE 1					NOTE 3					UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°					APPROVED					DATE																								
SHELL					NOTE 1					NOTE 2										<i>Ask</i> 08/02/06'																													
C RING					NOTE 5					NONE										CHECKED <i>Ask</i> DATE 08/02/06'																													
GASKET					SILICONE					RED										DRAWN					DATE																								
INSULATOR					NOTE 4					WHITE										FILE NO. Z:\NND\7811\NS\501\000\BDB-A1																													
BODY					NOTE 1					NOTE 2										TITLE SMA CRIMP PLUG (FOR RG-58/U,58C/U)																													
NO.					DESCRIPTION					MATERIAL					FINISH					Q'TY					DRAWING NO.					SCALE					4/1					ISSUE					A1				

BO-JIANG 帛江科技股份有限公司
BO-JIANG TECHNOLOGY CO., LTD.

TITLE SMA CRIMP PLUG (FOR RG-58/U,58C/U)
DRAWING NO. 7811NS501BD000B
FILE NO. Z:\NND\7811\NS\501\000\BDB-A1