

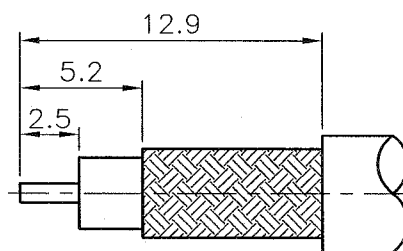
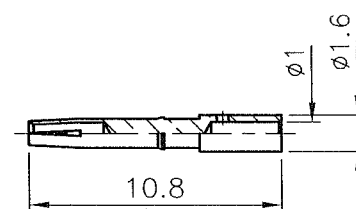
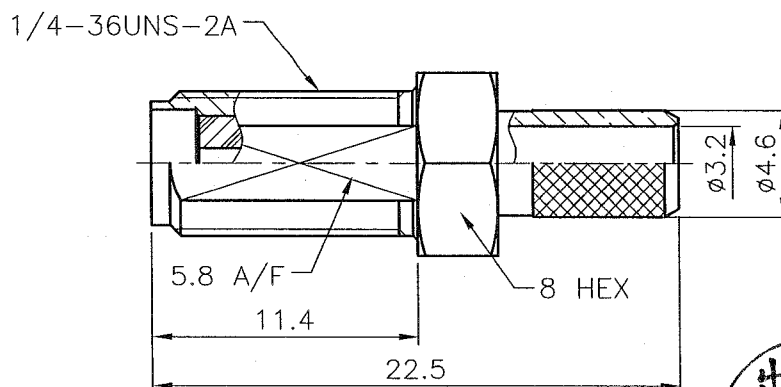



REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由R7812-BGTGA36 型號轉來\07/24/07'

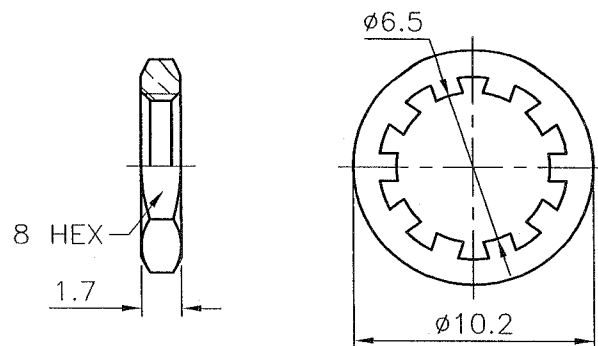

RECOMMENDED  
CABLE STRIPPING DIM'S  
(建議剝線尺寸)







RECOMMENDED  
MOUNTING HOLE  
(建議架設孔)

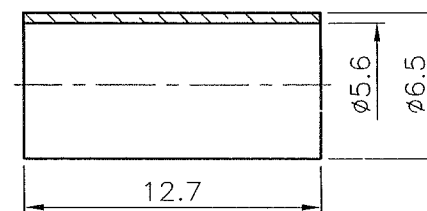

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. TEFLON MIL-P-19468
4. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
5. BERYLLIUM COPPER PER QQ-C-530
6. BRASS JIS H 3250, C 2700

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213" (5.41mm)  
(套管壓著工具)
2. CONTACT PIN TO SOLDER  
(中心針銲接)
3. MAX. PANEL THICKNESS=3.2mm  
(最大板厚)

						DIMENSIONS ARE IN MILLIMETERS				PART NO.		<div> 帛江科技股份有限公司</div> <div>BO-JIANG BO-JIANG TECHNOLOGY CO., LTD.</div>		
	NUT	NOTE 1	NOTE 2			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°				APPROVED	DATE		TITLE	
	WASHER	SS41	NOTE 2								07/24/07'		SMA BULKHEAD CRIMP JACK (FOR RG-58/U)	
	FERRULE	NOTE 6	NOTE 2							CHECKED	DATE			
	CONTACT PIN	NOTE 5	NOTE 4								07/24/07'			
	INSULATOR	NOTE 3	WHITE							DRAWN	DATE	DRAWING NO.	7861BS501BD001B	
	BODY	NOTE 1	NOTE 2								07/24/07'	FILE NO.	Z:\NND\7861\BS\501\001\7861BS501BD001B-A1	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A1					